




Model Number: **NGMC-25-XXXX**

RF Engineering
and Custom Build

Enigma IF & L-band Switch Matrix / Router

32 x 32 Combining IF & L-band signal routing

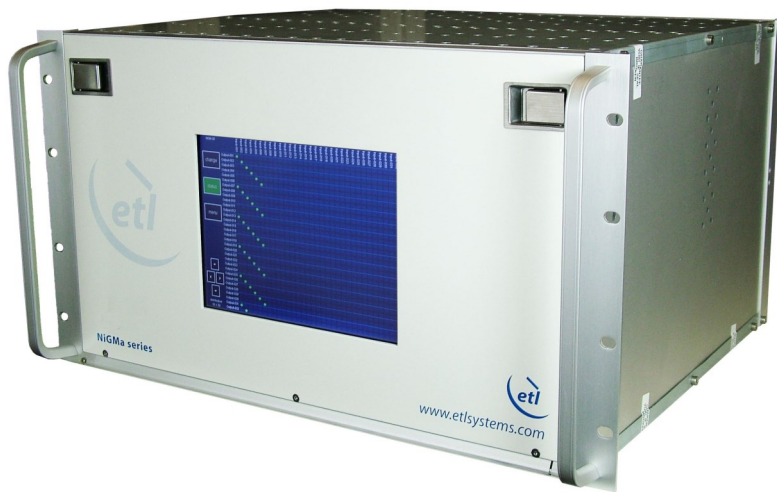

Front View of Model NGMC-25, showing touchscreen VGA

ETL's popular high performance Enigma L-band combining matrix evolves to set new benchmarks for RF performance and leading edge technologies.

The next generation of Enigma matrix focuses on **improved resilience and performance** the impact of failure is minimised throughout the unit.

As ETL customers use matrices in mission-critical applications, we understand the importance of redundancy and hot swap. Input and output cards, power supplies, CPU controller cards, fans and the new VGA human interface can all be **hot swapped**.

New Matrix design means there is one card associated with each input and each output – so failure of a card only affects one channel. For broadcasters, satellite operators and the defence sector, this provides exceptional resilience. The refined design offers rugged dual redundant power supplies with simple front access, enhanced CPU change-out, hot-swap fans and new card connectors. **Web Browser Interface** is standard on an NGMC-25.

Improved RF performance of the Enigma which provides superior Isolation, frequency response or flatness, and 1 dB GCP levels – helping our customers ensure that their overall RF chain signal performance is optimised.

Self Diagnostics with continuous monitoring (and reporting) of amplifier status, PSU status (including temperature), fan speed and internal communications is included as standard. Any problems are rapidly identified and hot swap means they can be addressed in minutes.





Model Number: NGMC-25-XXXX


Enigma IF & L-band Combining Switch Matrix / Router

RF Engineering
and Custom Build


NEW FEATURES:

A number of new features have been introduced to the Enigma matrix, including those described below:

Fast Matrix Card Changeout from front and rear

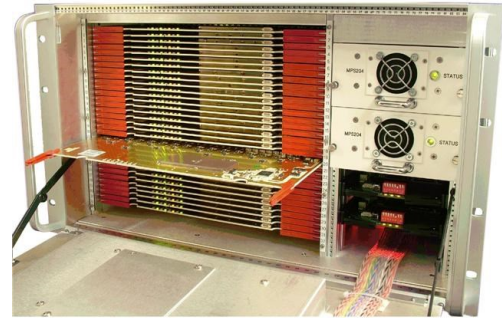

On board log records all routing changes for each user

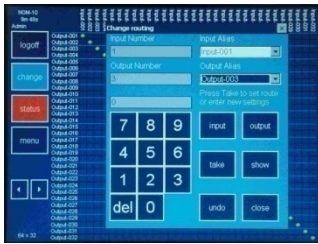

Touchscreen VGA control with security log on for up to 10 users



Aliases (10 character) on front screen to identify signal sources



FLEXIBILITY

The EEnigma Matrix can be adapted and grown to a number of different sizes

Master Matrix offers routing control from touchscreen or remotely

All modules offer hot-swap CPUs and PSUs for peace of mind



Front View

Hot-Swap Input & Output Matrix Cards on all modules offer easy expansion

Active Splitter & combiners offer patch panel & gain options



Model Number: NGMC-25-XXXX


Enigma IF & L-band Combining Switch Matrix / Router

RF Engineering
and Custom Build

Resilience

Resilience is designed-in

The Enigma matrix has been designed with resilience in mind. The impact of component failure is minimised and all active components can be hot swapped. Problems are rapidly identified and can be easily sorted out.


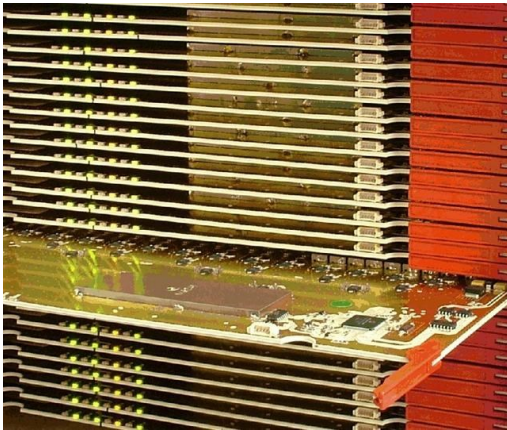


Minimal impact from card failure

One card per input and one card per output mean that the impact of card failure is minimised. Cards can be hot-swapped, and hot expansion can take place in single increments.

Minimal impact from CPU failure

The matrix contains dual redundant CPU's which both operate in parallel. If one CPU fails the other automatically becomes the master. CPU's can be hot-swapped.

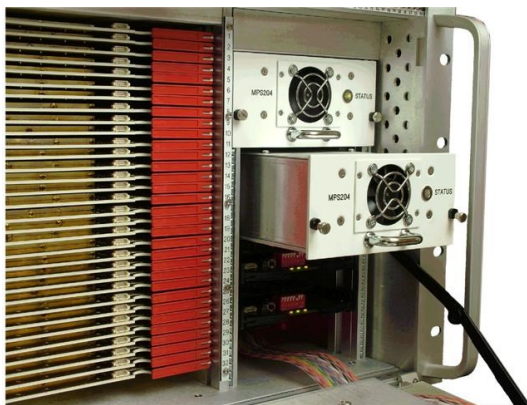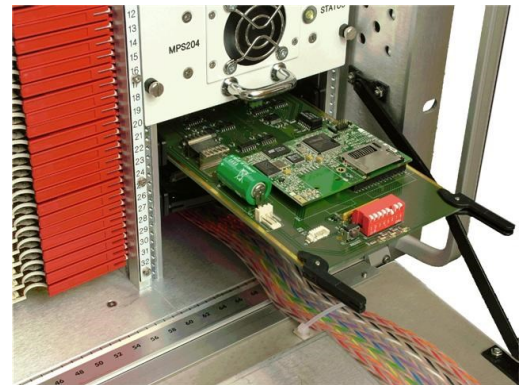

Minimal impact from PSU failure

Dual redundant PSU's can be hot-swapped.

Rapid diagnosis of problems

The matrix continuously monitors the conditions of amplifiers, CPUs and PSUs. Any faults are immediately reported through the front panel and remotely. Alarms report the specific faults down to component level.





Model Number: NGMC-25-XXXX

Enigma IF & L-band Combining Switch Matrix / Router

RF Engineering
and Custom Build

Technical specifications and operating parameters

RF Parameters					
Frequency		50-200 MHz	950-1750 MHz	950-1950 MHz	850-2150 MHz
All connector types, frequency dependant					
Isolation	Input-output	65 dB	65 dB	60 dB	60 dB
	Input-input	75 dB	75 dB	70 dB	70 dB
	Output-output	75 dB	75 dB	70 dB	70 dB
NGMC-25-B5B5 (all ports 50 ohm BNC)					
Flatness	Operational bandwidth	±1.0 dB	±1.0 dB	±1.25 dB	±1.5 dB
	Any 36MHz	±0.35 dB	±0.25 dB	±0.25 dB	±0.25 dB
Input return loss	Typical	22 dB	18 dB	18 dB	17 dB
	Minimum	18 dB	16 dB	16 dB	14 dB
Output return loss	Typical	22 dB	18 dB	17 dB	16 dB
	Minimum	18 dB	16 dB	16 dB	14 dB
NGMC-25-S5S5 (all ports 50 ohm SMA)					
Flatness	Operational bandwidth	±1.0 dB	±1.0 dB	±1.25 dB	±1.25 dB
	Any 36MHz	±0.25 dB	±0.20 dB	±0.20 dB	±0.25 dB
Input return loss	Typical	22 dB	18 dB	17 dB	16 dB
	Minimum	18 dB	16 dB	16 dB	14 dB
Output return loss	Typical	22 dB	18 dB	18 dB	17 dB
	Minimum	18 dB	16 dB	16 dB	15 dB
NGMC-25-B7B7 (all ports 75 ohm BNC)					
Flatness	Operational bandwidth	±1.2 dB	±1.02 dB	±1.5 dB	±2.0 dB
	Any 36MHz	±0.25 dB	±0.25 dB	±0.25 dB	±0.30 dB
Input return loss, Typical		12 dB	12 dB	10 dB	10 dB
Output return loss, Typical		18 dB	18 dB	16 dB	15 dB
NGMC-25- F7F7 (all ports 75 ohm F-types)					
Flatness	Operational band width	±1.2 dB	±1.02 dB	±1.5 dB	±2 dB
	Any 36MHz	±0.25 dB	±0.35 dB	±0.35 dB	±0.40 dB
Input Return Loss, Typical		10 dB	8 dB	8 dB	8 dB
Output Return Loss, Typical		15 dB	15 dB	14 dB	12 dB
ALL VERSIONS					
Gain		0 ± 1 dB		Mean across band	
1dB Compression	Typical	3.5 dBm		At unity gain	
	Minimum	0 dBm			
Noise figure	Typical	23 dB		At unity gain	
	Maximum	26 dB			

Physical	
RF connectors	BNC / F-type / SMA
Impedance	50Ω / 75Ω
Dimensions	6U high x 450mm deep x 19" wide
Weight	29 kg Fully Populated
Colour	White 00-E-55 semi-gloss

Environmental	
Operating temperature	0 to 45°C
Location	Indoor use only
Storage temperature	-20°C to +75°C
Humidity	20 to 90% non-condensing

Power		
AC Power	85-264Vac 50/60Hz	Fused 2A
Input RF power	+20 dBm	Absolute maximum
PSU	Dual redundant	Diode OR
Hot-swap PSU	Yes	

Key Features	
Input Splitter Cards	One Card per input
Output Switch Cards	One Card per output
Matrix Cards	Single, Hot-swap
CPU	Dual redundant, Hot-swap
PSU	Dual redundant, Hot-swap
Self Diagnostics	Continuous Monitoring

PRELIMINARY SPECIFICATIONS

ETL SYSTEMS LIMITED
Coldwell Radio Station
Madley
Hereford
England HR2 9NE

TELEPHONE
+44 (0)1981 259020

EMAIL
info@etlsystems.com

FACSIMILE
+44 (0)1981 259021

WEB
www.etlsystems.com

