



# Alto series 1+1 Redundant Amplifier with variable gain (75Ω system)


The Alto series of amplifiers provide excellent RF performance with a wide range of functionality, in a compact chassis. They are designed with hot swap amplifier modules to enhance resilience and flexibility.

**Other options in the Alto range:** The Alto amplifier range is also available with additional features such as LNB Powering, 10MHz and DC pass, Auto Gain Control and Redundancy configurations up to 4+2.

**Typical applications:**

- Compensation for passive splitters/combiners and cable loss
- General satcoms – teleports, video head-ends, TVRO

## Chassis

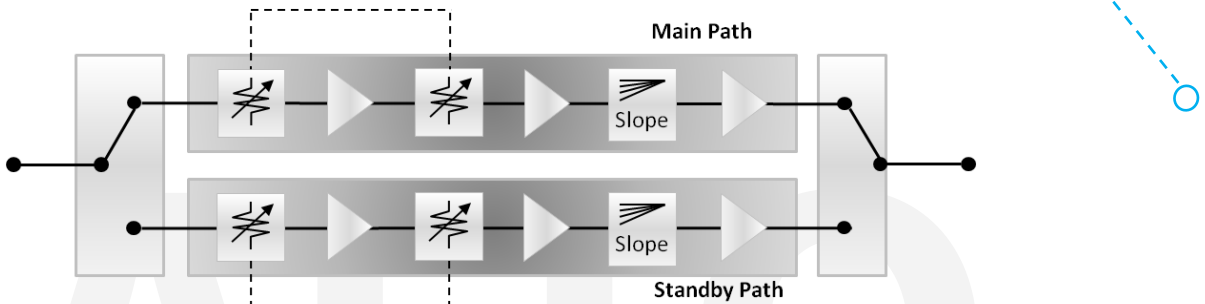

**Redundancy configuration** 1+1 Redundancy



**Resilience** from dual redundant hot-swap power supplies & hot-swap amplifier modules



**Remote control & monitoring** via RJ45 Ethernet port with SNMP & web browser interface



**Local control & monitoring** via front panel push buttons & display



## Amplifier Module Options



**IF & L-band** (850 - 2150MHz & 50 - 200MHz) operating frequency range options



**Variable gain & slope compensation** to balance input signals



**Low Noise options** for prime signal quality



**High Linearity options** ensures overall RF gain signal performance is optimised





Chassis - Specification		
Model Numbers	ALT-C300-1U-x7x7	
Dimensions	1U high x 350mm deep x 19" wide	
Capacity	2 modules: 1+1 redundancy	
Impedance & RF Connectors	75 Ω BNC / F-type	
Weight	5 kg	
Colour	White 00-E-55 semi-gloss	
AC Power	85-264Vac 50/60 Hz, Fused 2A	
PSU	Hot-swap, dual redundant, Diode OR	
Power Consumption	< 50W steady state, all modules fitted. Total AC input.	
Local control & monitoring	Via front panel LCD and keypad	
Remote control & monitoring	Ethernet via RJ45, 10BaseT/100BaseTx, ETL TCP/IP protocol, SNMP & web browser interface	
Monitoring	Amplifier bias voltages, amplifier supply voltages, temperature monitoring & PSU status	
Operating Modes	Amplifier Tracking ON - Amplifier gain & slope control is common to both modules in the chassis Amplifier Tracking OFF: Each amplifier can be independently set by operator selected slope & gain setting Redundancy: Redundant amplifier can be set as hot or cold standby amplifier	
MTBF	119,714 hours	
Temperature	Operating: 0 to 55 °C	Storage: -20 to +75 °C Indoor use only
Humidity	20% to 90% non-condensing	Relative humidity

Amplifier Module Options - RF Parameters								
Amp Module Model Numbers	ALT-R-L1-006	ALT-R-L1-008	ALT-R-L1-012	ALT-R-F2-013	ALT-R-L1-019	ALT-R-L1-023	ALT-R-L1-028	
Frequency Range	850-2150 MHz (L-band)	850-2150 MHz (L-band)	850-2150 MHz (L-band)	50-200 MHz (IF)	850-2150 MHz (L-band)	850-2150 MHz (L-band)	850-2150 MHz (L-band)	
Gain	Maximum	35 ± 1.5 dB	27 ± 1.5 dB	45 ± 2 dB	39 ± 2 dB	45 ± 2 dB	47 ± 2 dB	41 ± 2 dB
	Minimum	5 ± 1.5 dB	4 ± 1.5 dB	15 ± 2 dB	9 ± 2 dB	15 ± 2 dB	17 ± 2 dB	11 ± 2 dB
Flatness	850-2150MHz	± 1.5 dB	± 1.75 dB	± 1.75 dB	± 1.50 dB	± 2.25 dB	± 2 dB	± 2.25 dB
	Over 36MHz	± 0.35 dB	± 0.35 dB	± 0.35 dB	± 0.45 dB	± 0.45 dB	± 0.35 dB	± 0.35 dB
Gain Steps	0.5 ± 0.1 dB	0.5 ± 0.1 dB	1 ± 0.15 dB	1 ± 0.15 dB	1 ± 0.15 dB	0.2 ± 0.1 dB	1 ± 0.2 dB	
Input Return Loss	Typical	13 dB	16 dB	16 dB	16 dB	16 dB	16 dB	16 dB
	Minimum	9 dB	11 dB	10 dB	10 dB	10 dB	12 dB	12 dB
Output Return Loss	Typical	13 dB	13 dB	16 dB	16 dB	13 dB	16 dB	16 dB
	Minimum	9 dB	9 dB	10 dB	10 dB	10 dB	12 dB	12 dB
Slope Control Range	Range: 0 to 6 dB Steps: 1 ± 0.5 dB	Range: 0 to 6 dB Steps: 1 ± 0.5 dB	Range: 0 to 6 dB Steps: 1 ± 0.5 dB	-	Range: 0 to 6 dB Steps: 1 ± 0.5 dB	Range: 0 to 6 dB Steps: 1 ± 0.5 dB	Range: 0 to 6 dB Steps: 1 ± 0.5 dB	
Noise Figure	Typical	9.5 dB	10.5 dB	9.5 dB	4.5 dB	5 dB	2.3 dB	4.5 dB
	Maximum	11 dB	12 dB	11 dB	6 dB	6.5 dB	3.8 dB	6 dB
1dB GCP	Typical	15.5 dBm	22.5 dBm	18.5 dBm	30.5 dBm	29.5 dBm	24 dBm	26.5 dBm
	Minimum	13.5 dBm	20.5 dBm	16.5 dBm	29.5 dBm	27.5 dBm	22 dBm	24.5 dBm
OIP3	Typical	27.5 dBm	35.5 dBm	38.5 dBm	41.5 dBm	39.5 dBm	35.5 dBm	38.5 dBm
	Minimum	24.5 dBm	32.5 dBm	35.5 dBm	38.5 dBm	36.5 dBm	32.5 dBm	35.5 dBm
OIP2	Typical	43.5 dBm	45.5 dBm	49.5 dBm	N/A	51.5 dBm	46.5 dBm	47.5 dBm
	Minimum	39.5 dBm	41.5 dBm	45.5 dBm	N/A	47.5 dBm	42.5 dBm	43.5 dBm
Isolation	Typical	60 dB						
	Minimum	50 dB						
Max total RF i/p power	20 dBm Damage level, not operational							

ETL SYSTEMS LIMITED  
Coldwell Radio Station  
Madley  
Hereford  
England HR2 9NE

TELEPHONE  
+44 (0)1981 259020  
  
EMAIL  
info@etlsystems.com

FACSIMILE  
+44 (0)1981 259021  
  
WEB  
www.etlsystems.com

