


DATASHEET FIBER OPTICS

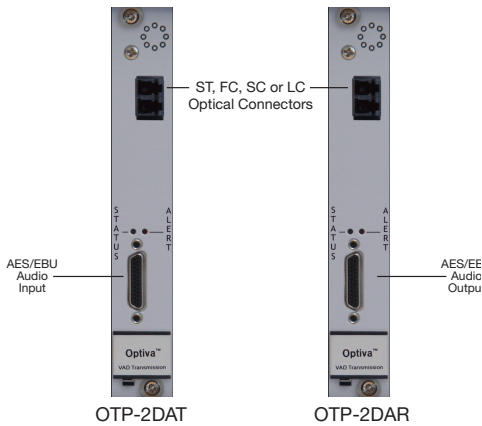

Digital Audio Transmission

The OTP-2DA provides for the transmission of 2 channels of AES/EBU Stereo Digital Audio.

The OTP-2DA offers the complete flexibility needed to transport digital audio over a single optical fiber. The system is an excellent choice for transporting AES/EBU audio signals over long or short distances with one fiber. In addition, the OTP-2DA is part of the innovative Optiva Series Video, Audio and Data Media Transport System. New signals may be added or fully redundant optical transport solutions may be developed.

Features

- Stereo Digital Audio over Fiber (Micro DB25 connector)
- Singlemode Options (up to 60 km)
- Multimode Options (up to 2 km)
- TDM - Single Wavelength
- No EMI, RFI, or Ground Loops
- Compatible with MDM-7000 Series for CWDM Multiplexing
- 3-Year Warranty

Applications

- Remote OB Van/Truck Video Feeds
- Broadcast Studio Camera Feeds
- SD Routing (Requires Optilinx Optical Switch)
- Long-Haul Signal Transport
- Lecture Hall Projector Connectivity
- Medical / Surgical Room Broadcast

System Design

Optiva insert cards support both 19" rack mount and compact tabletop or wall-mountable enclosures. The 3RU 19" rackmount enclosure (Model: OT-CC-16-100) can support up to 16 insert cards. It also supports dual-redundant, hot-swappable power supplies (Model: OT-CC-16-100-RPS) utilizing two PS-100 power supplies or two PS-200 power supplies (Model: OT-CC-16-200-RPS). Also available in the rackmount form factor is the four-slot (Model: OT-CC-4-1U) which houses four insert cards in 1RU of rack space. The compact one-slot (Model: OT-DTCR-1) and two-slot (Model: OT-DTCR-2) enclosures both use an external power supply (Model: PS-9012).



DATASHEET **FIBER OPTICS**

Models

Transmitter	Receiver
OTP-2DAT-A0-XX	OTP-2DAR-A0-XX
OTP-2DAT-A1-XX	OTP-2DAR-A1-XX
OTP-2DAT-A2-XX	OTP-2DAR-A2-XX
OTP-2DAT-A2D-XX	OTP-2DAR-A2D-XX
OTP-2DAT-A3-XX	OTP-2DAR-A3-XX
OTP-2DAT-A3D-XX	OTP-2DAR-A3D-XX
OTP-2DAT-L4x1-XX	OTP-2DAR-L4x1-XX
OTP-2DAT-NOC	OTP-2DAR-NOC


- When ordering, please substitute the "XX" in the model for one of the following optical connectors: ST, FC, SC, or LC.
- Standard SC connector type is UPC. APC is available upon request.

Optical Specifications

Code	Fiber Type	Wavelength	Optical Budget	Distance
A0	Multimode	850 nm	7 dB	0.5 km
A1	Multimode	1310 nm	5 dB	2 km
A2	Singlemode	1310 nm	7 dB	10 km
A2D	Singlemode	1310 nm	12 dB	20 km
A3	Singlemode	1550 nm	17 dB	40 km
A3D	Singlemode	1550 nm	25 dB	60 km
L4x1	Singlemode	CWDM	Varies	20-70 km

- Chromatic dispersion as well as other losses should also be taken into account
- Stated distances are the maximum range, shorter distance may require attenuation

Connection Diagram

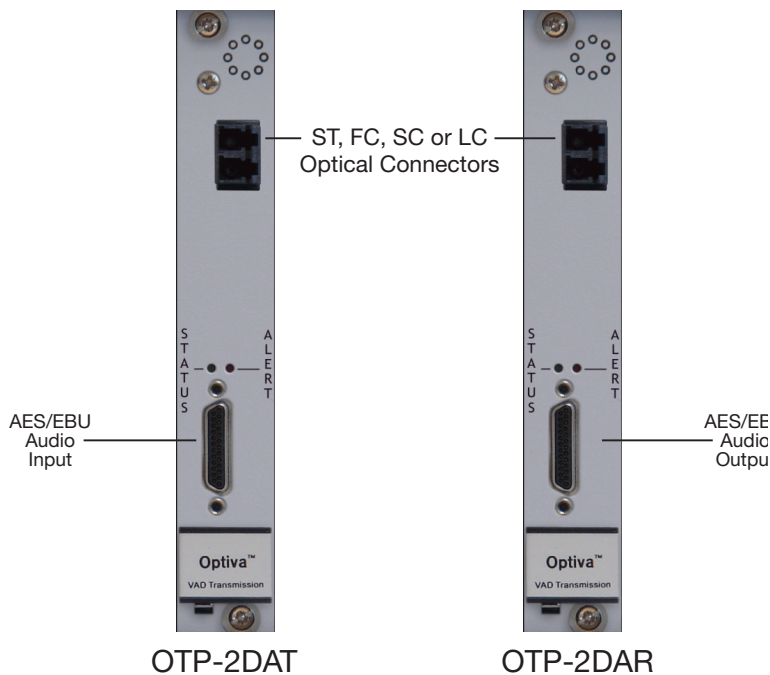

Audio

Specifications	Values
Digital Format	AES/EBU AES3-1992 (ANSI S4,40) SMPTE 276M
Connector	Micro DB25

General


Specifications	Values
Dimensions (Insert Card)	6.69" L x 0.81" W x 5.06" H
Weight	11 oz.
Operating Temperature	-20°C to +55°C
Storage Temperature	-40°C to +85°C
Humidity	0 to 95% (Non-Condensing)
Operating Voltage	12 VDC
Power Consumption	6 Watts
Bit Error Rate	10 ⁻¹⁴
System Latency	< 1 ms
Warranty	3 year

Monitoring & Control

Specifications	Values
Local	Front panel LED status and alert indicators
Remote	OptivaView SNMP Management Suite*

- * Requires OptivaView SNMP Controller Card (Model: OPV-CTLR)

Enclosure Options

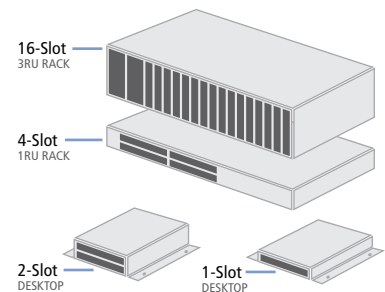

Compliance

