

HDMI Switching & Distribution

3x10 Switching/Distribution & 1x5 HDMI Distribution



DATASHEET SWITCHING, ROUTING & DISTRIBUTION



VX-HDMI-3/10



VX-HDMI-1/5

Features

- Maximum Resolutions [VESA / SMPTE]:
WUXGA: 1920x1200 @ 60Hz
1080p: @ 60Hz
- HDMI Switch: (Model: VX-HDMI-3/10)
- HDMI Distribution Amp.: (Model: VX-HDMI-1/5)
- HDMI v1.3a
- HDCP compliant
- 19" Rackmount ready

Applications


- Professional audio visual installations
- Home theater connectivity
- Control centers / communication hubs
- Automation & Monitoring rooms
- Security system monitoring
- Public digital signage displays
- Airport/Train/Other mass-transit facilities
- Medical / distance learning theaters

HDMI Signal Switching & Distribution

EMCORE's VX-HDMI-3/10 HDMI switch allows you to select one out of the three (3) HDMI compliant sources (set-top boxes, DVD players, D-VHS players, computers) and distribute that signal out to as many as 10 displays. The VX-HDMI-3/10 supports HDMI 1.3a and is HDCP compliant over all channels. Switches easily between the 3 sources via front panel buttons, IR or RS232 serial interface. Output on up to ten (10) mirrored displays with HDMI connectors.

The VX-HDMI-1/5 HDMI distributor offers up to five (5) HDMI displays to be connected to a single (1) video source. Like the 3/10, the 1/5 supports 1080p and WUXGA (1920x1200). Both are CE & FCC certified.

Connection Diagram

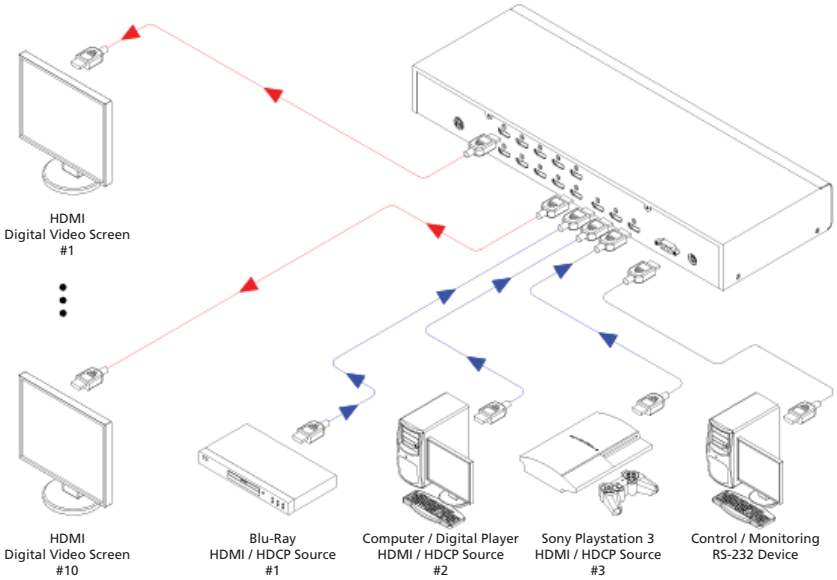

EMCORE reserves the right to change the design or specifications of the product at any time without notice. EMCORE and the EMCORE logo are trademarks of EMCORE Corporation.